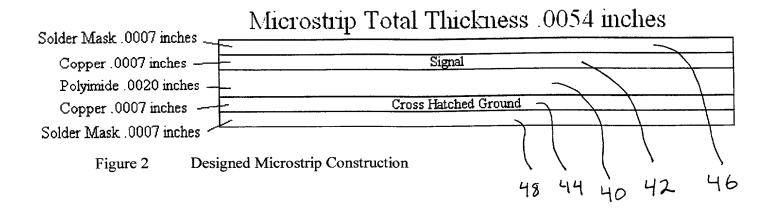
Stripline Total Thickness .0181 inches Solder Mask .0010 inches 18 Ground 16 Copper .0007 inches Polyimide .0070 inches 12 FIG Copper .0007 inches Signal 10 IA Polyimide .0070 inches Copper .0007 inches Ground Solder Mask .0010 inches Microstrip Total Thickness .0064 inches Solder Mask .0010 inches -36 F16 Copper .0007 inches -Signal 32 Polyimide .0030 inches 30 IB Copper .0007 inches Ground 34

Microstrip vs. Stripline Construction

Solder Mask .0010 inches

The first than

In the first the time that



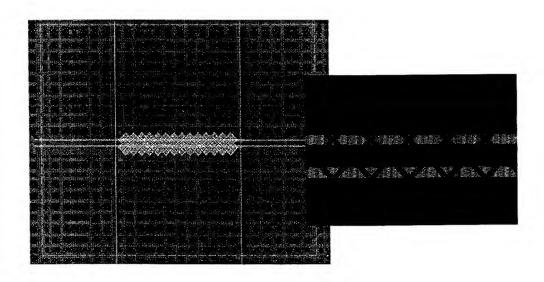


Figure 3 Simulation Set Up for 50 ohm Transmission Line




Figure 4 Simulation Results for 50 ohm Transmission Line – Amount of Reflection with a transmission line terminated with 50 ohms




Figure 5 Simulation Results for 50 ohm Transmission Line – Amount of Reflection with a transmission line terminated with 50 ohms plotted on a Smith Chart

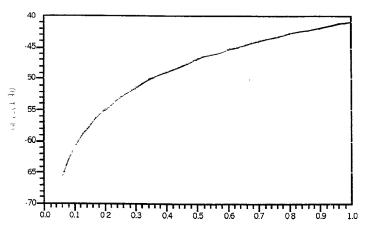


Figure 6 Simulation results for 50 ohm transmission line – Isolation between adjacent traces

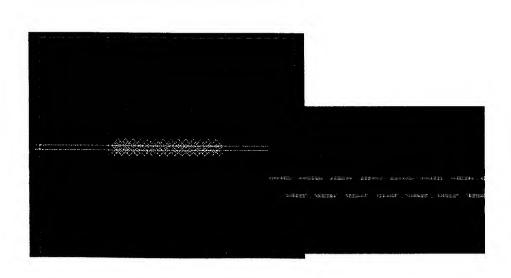


Figure 7 75 ohm transmission line simulation set up

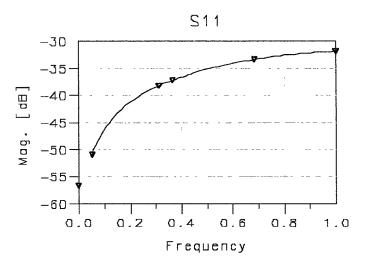


Figure 8 Simulation Results for 75 ohm Transmission Line – Amount of Reflection with a transmission line terminated with 75 ohms




Figure 9 Simulation Results for 75 ohm Transmission Line – Amount of Reflection with a transmission line terminated with 75 ohms plotted on a Smith Chart




Figure 10 Simulation results for 75 ohm transmission line – Isolation between adjacent traces

The crosshatched utilized in these designs is shown in figure 11 below.



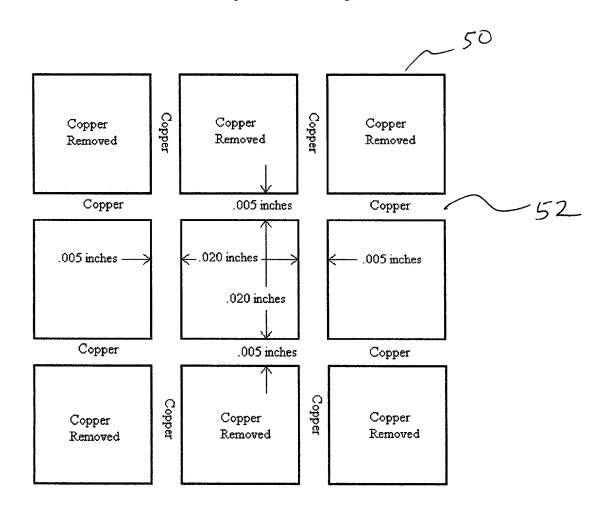



Figure 11 Cross Hatch utilized on Ground Plane

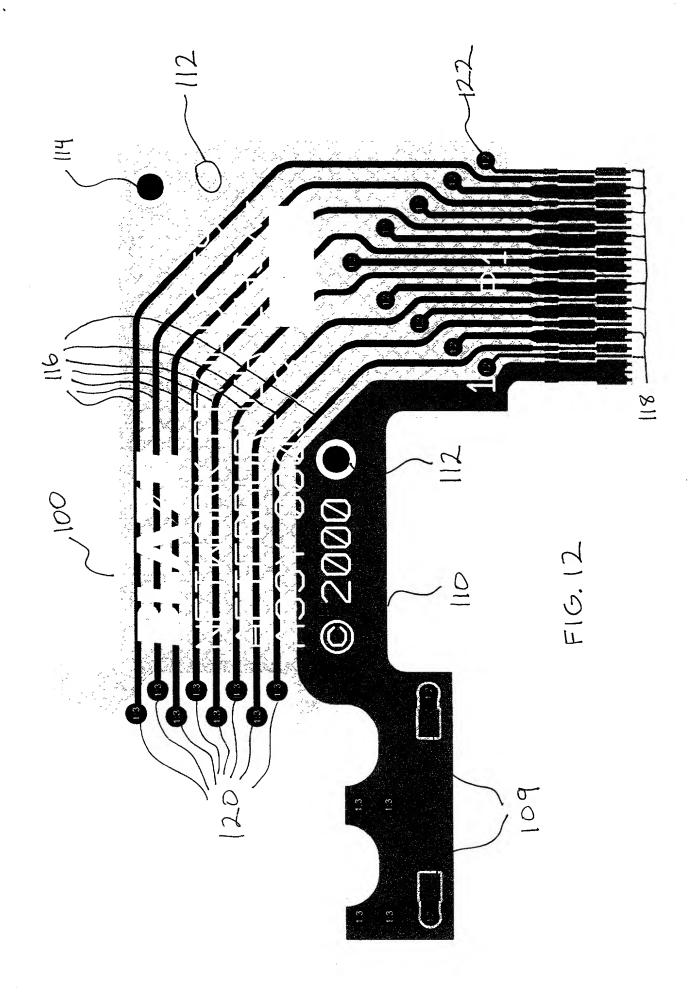


D:\Projects\000435R03\PCB\000435R03.pcb - Page 1 of 1 pages.

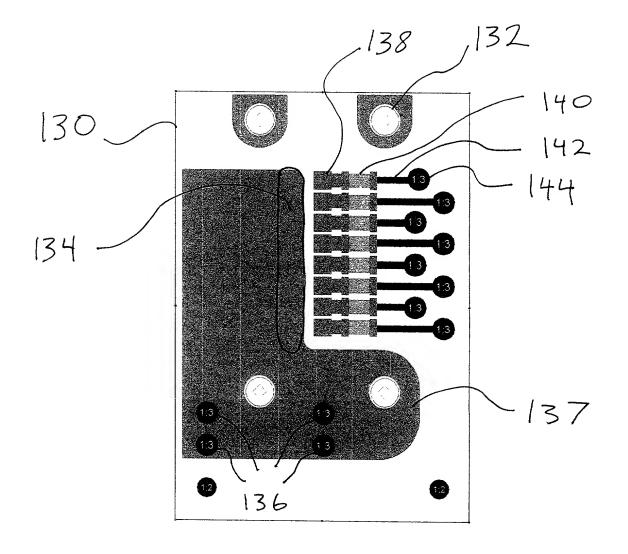



F16 13

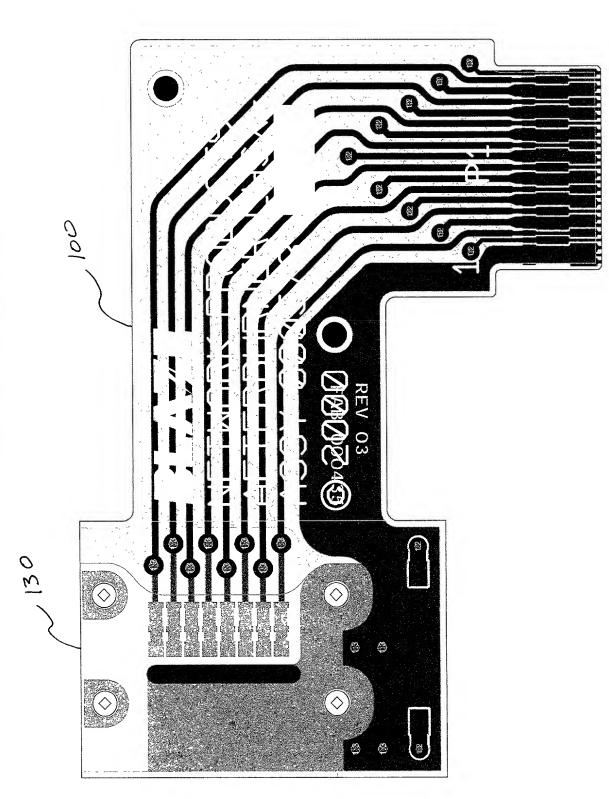


F16. 14A

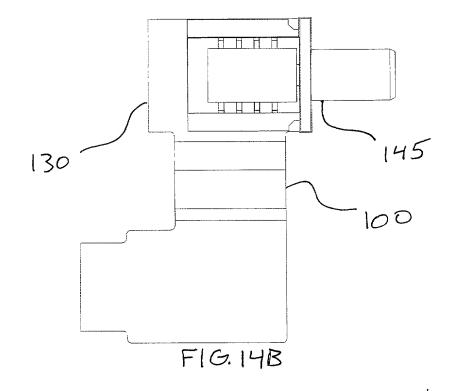

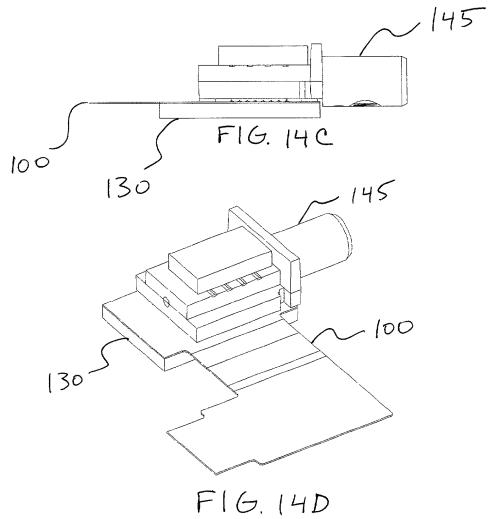


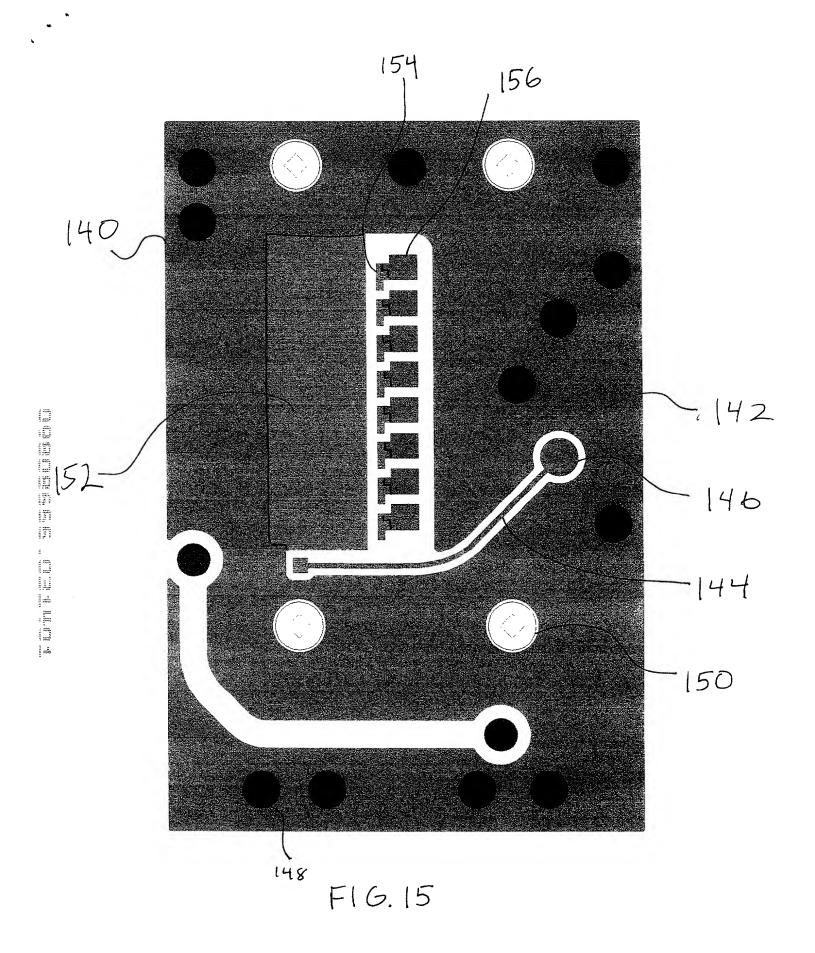


D:\Projects\000436R03\PCB\000436R03.pcb - Page 1 of 1 pages.

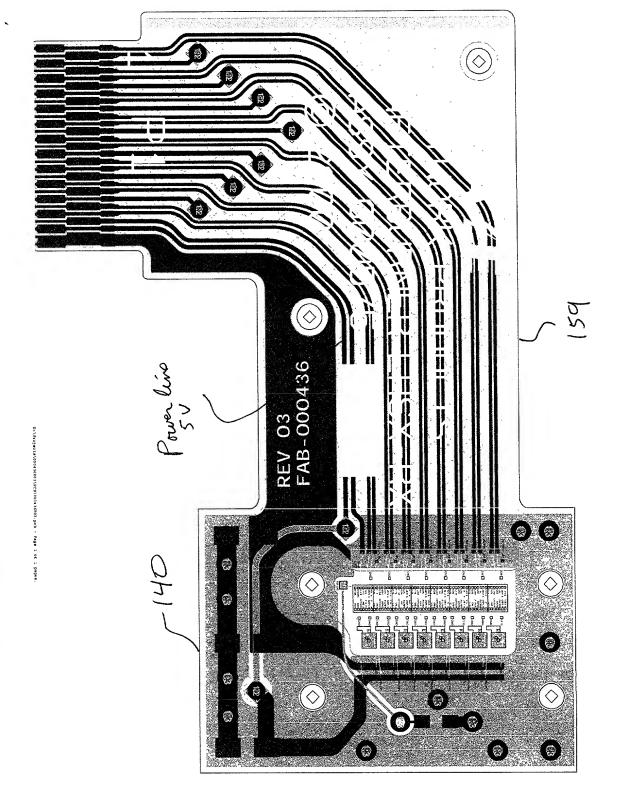

F16. (7A

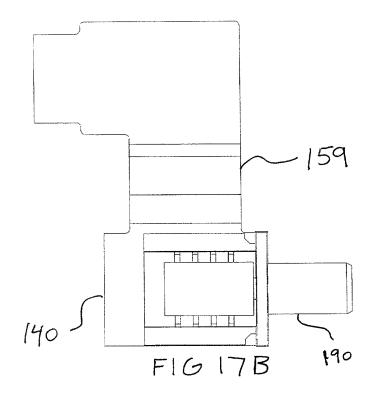

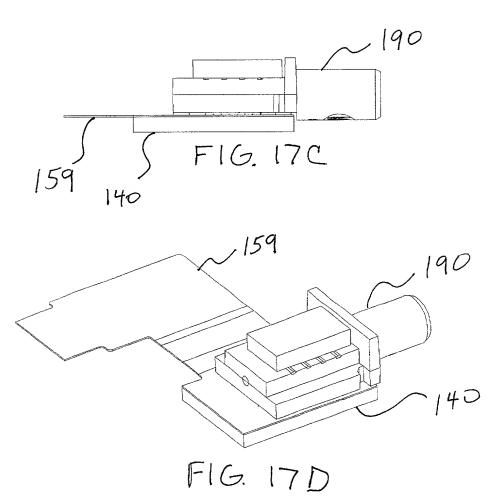

ngeneck return